

Gazzini

ATELIER


GIAR




Atelier is a line with a classic soul redesigned for modern tastes. It has the look of limestone that is artfully fashioned to straddle the line between rustic and modern. Gazzini was inspired by the popular Tala limestone, and then they mixed in some subtle travertine graphics to add extra depth to the neutral palette. The edges are slightly chiseled, yet they are also rectified allowing for tighter grout joints. The surface structure has some texture without being overdone. The 16x16 size offers a square size sets the line apart by being something different, while at the same time it's completely logical and appropriate for the look of the tile. This is a line with timeless, natural charm that will appeal to diverse tastes.



Beige (GIARBE)

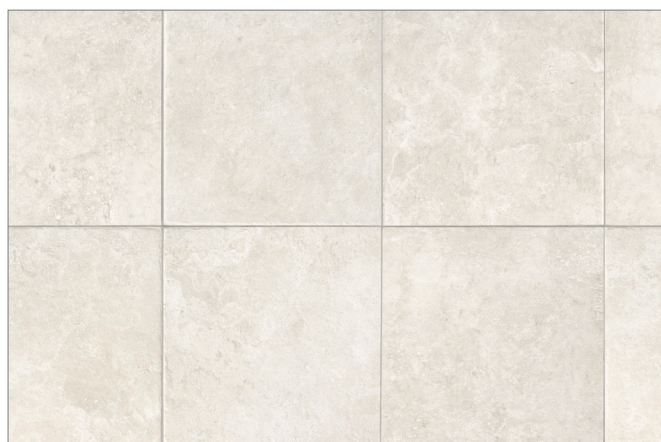

Ivory (GIARIY)

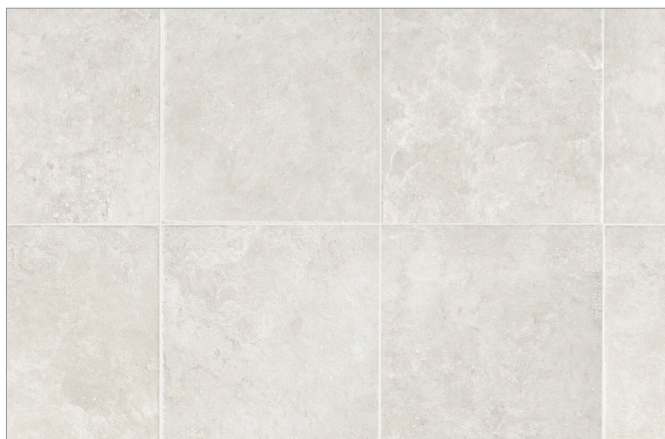

White (GIARWE)



Grey (GIARGY)

Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout. See reverse side for additional product information.

Product Information

Colors

Beige	GIARBE
Grey	GIARGY
Ivory	GIARIY
White	GIARWE

Mosaic Available in all colors

2 x 2 GIAR--/22



Beige (GIARBE/22)



Grey (GIARGY/22)



Ivory (GIARIY/22)



White (GIARWE/22)

Size (Rectified)

16 x 16 GIAR--/1616

Trim

The surface bullnose is made from field tile that is cut, ground and reglazed.

2 x 24 Surface Bullnose GIAR--/SBN

Usage

Atelier is suitable for residential to moderate commercial applications.

Installation

To attain the proper mix of graphics and color it is important to pull from multiple boxes during installation, rotate pieces, and note the placement of the different images to get the proper final blend.

Most tile manufacturers recommend a maximum offset of 8" (20 cm) on all large format tiles when setting a running bond. Please refer to ANSI requirements for setting large format tiles, ANSI A 108.2 section 4.3.8. Using a leveling system can improve the installation of this product.

TECHNICAL INFORMATION

Physical Properties	Norms	Value
Abrasion Resistance	10545-7	PEI 5
Water Absorption	10545-3	Conforms
Frost Resistance	10545-12	Conforms
Breaking Strength	10545-4	Conforms
Slip Resistance	DIN 51130 R DIN 51097	R10 A+B
Dynamic Coefficient of Friction (DCOF)	BOT 3000 E	≥ 0.42 Wet

The Dynamic Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs. As noted in the American with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.

