

MARCA CORONA

DELICATA


Marca Corona excels at white marbles and Delicata is the new collection showcasing their special skill and expanding the concept into warmer tones. The Calacatta Velato is timeless, sophisticated and remarkably subtle, with veins that are so gently rendered that it really looks like they are underneath the surface, and some pieces have almost no veining at all. The Pure Avorio is a honey onyx. It's warm and inviting, and the same technique of layered graphics creates a depth where it feels like you are looking through a translucent surface to what's beneath. The Taj Cristallo is the much sought-after Cristallo version of Taj Mahal. They worked hard to get the color just right and also toned down the graphic of the real marble to make it even more appealing. The Velvet finish feels like a honed surface, that is smooth but still passes DCOF.




Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout.

Colors

12 x 24

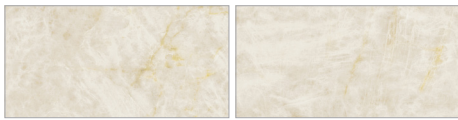

24 x 48*

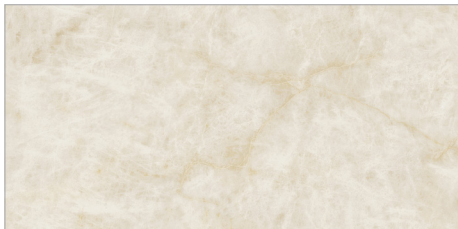


Taj Cristallo (MCDATC)

Product Information



Calacatta Vellato (MCDACV)

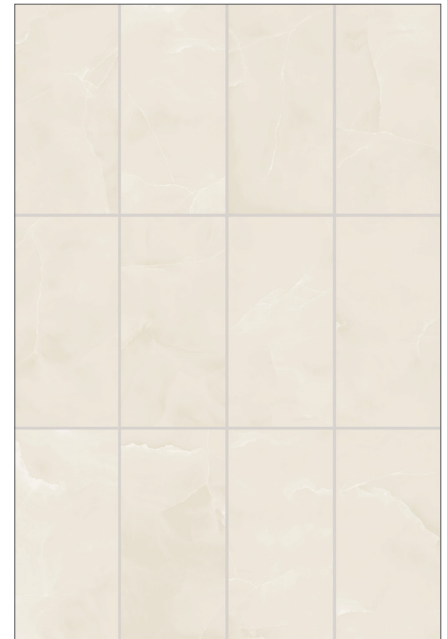

Pure Avorio (MCDAPA)

Sizes (Rectified) - Velvet Finish


12 x 24 MCDA--V/1224

24 x 48* MCDATCV/2448

*Available in Taj Cristallo color only.

Due to the special packing required for the large format tiles, orders for the 24x48 size must be for full box quantities only & we are not able to fill orders on the same day as placed.


Mosaic - 3" Hex (Velvet Finish, Full sheet shown)



MCDATCV/3HX



MCDACVV/3HX



MCDAPAV/3HX

Trim - Velvet Finish

3 x 24 Surface Bullnose MCDA--V/SBN

The surface bullnose is made from field tile that is cut, ground and reglazed.

Usage and Installation

Delicata is suitable for both residential and commercial applications that do not require an R rating. As with all inkjet products, there are many different graphics that are mixed and packed randomly. To attain the proper mix of graphics and color it is important to pull from multiple boxes during installation, rotate pieces, and note the placement of the different images to get the proper final blend.

Most tile manufacturers recommend a maximum offset of 8" (20 cm) on all large format tiles when setting a running bond. Please refer to ANSI requirements for setting large format tiles, ANSI A 108.2 section 4.3.8. Using a leveling system can improve the installation of this product.

TECHNICAL INFORMATION - VELVET FINISH

Physical Properties	Norms	Value	Physical Properties	Norms	Value
Deep Abrasion Resistance	10545-6	<150 mm ³ Conforms	Breaking Strength	10545-4	Conforms
PEI - See "Deep Abrasion Resistance"	ISO 10545-7	N/A	Dynamic Coefficient of Friction (DCOF)**	BOT 3000E STANDARD ANSI A326.3:2022	≥ 0.42 Wet
Water Absorption	10545-3	Conforms	** These results are for the natural finish and for the normal productions; if there is concern about a particular production, it should be tested. The Dynamic Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs.		
Frost Resistance	10545-12	Resistant			