


Gazzini

MARQUINIA

It is not easy to emulate the true, deep black of the popular Nero Marquina marble from Spain but Gazzini rose to the challenge with their Marquinia series. Using the purest raw materials in their colored-body porcelain clay, they were able to obtain a genuine black color. By adding the marble's distinctive white veins, this porcelain is recognizable as a superior interpretation of a classic and dramatic choice. It is suitable for residential applications.

Floor: 12 x 24 and 4" Hex
Black Natural

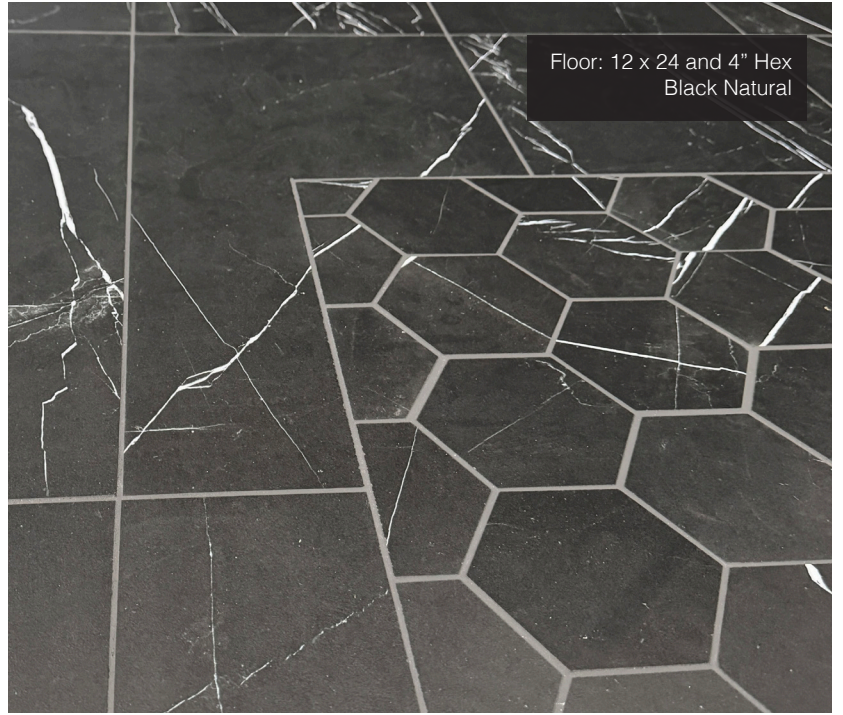

Floor: 12 x 12 Marquinia Black Natural
and 12 x 12 Marmi Carrara Natural




Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout. See reverse side for additional product information.

Product Information


Sizes and Color (Rectified) Natural Finish

12 x 12 Black	GIMABKN/1212
12 x 24 Black	GIMABKN/1224

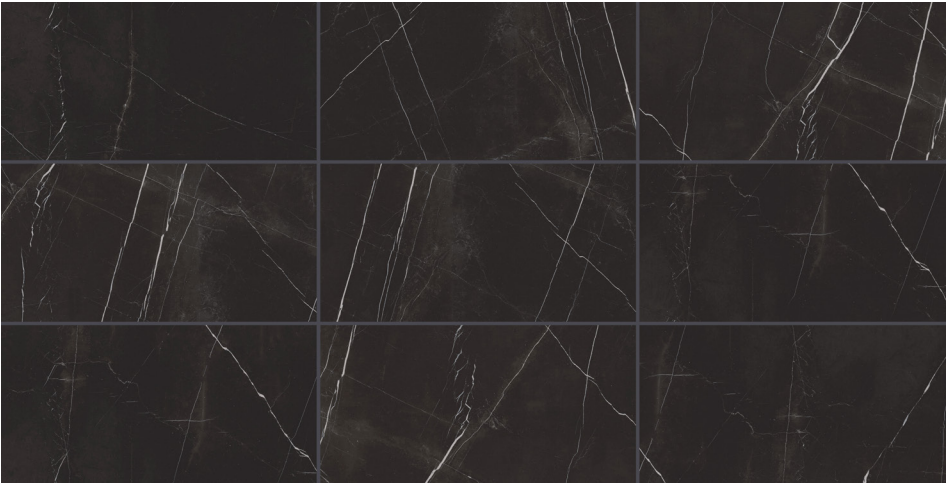

Mosaics Natural Finish

2 x 2	GIMABKN/22
4" Hex	GIMABKN/4HX



2 x 2 Mosaic
(full sheet shown)



4" Hex Mosaic
(full sheet shown)

Trim The surface bullnose is made from field tile that is cut, ground and glazed.

3 x 12 Surface Bullnose Black GIMABKN/SBN

Usage

Marquinia in Natural finish is suitable for residential applications.

Installation Information

To attain the proper mix of graphics and color, it is important to pull from multiple boxes during installation, rotate pieces, and note the placement of the different images to get the proper final blend. Most Italian manufacturers recommend a maximum offset of 8" (20cm) on all large format tiles when setting a running bond. Please refer to ANSI requirements for setting large format tiles, ANSI A 108.2 Section 4.3.8. There are special setting requirements and materials for large format tiles. Please refer to the TCNA Handbook and guidelines by your mortar manufacturer for more information. Using a leveling system can improve the installation of this product.

If using multiple sizes or colors together from a different series (such as Marmi Carrara (CGMI)), please be aware that the thicknesses of different series can vary slightly and need to be considered. A leveling system is recommended along with a minimum 3/32" grout joint.

TECHNICAL INFORMATION

Physical Properties	Norms	Value	Physical Properties	Norms	Value
Deep Abrasion Resistance	10545-6	<175 mm ³ Conforms	Breaking Strength	10545-4	Conforms
PEI - See "Deep Abrasion Resistance"	ISO 10545-7	N/A	Slip Resistance	DIN 51130 R	R9
Water Absorption	10545-3	Conforms	Dynamic Coefficient of Friction (DCOF)**	BOT 3000E STANDARD ANSI A326.3:2017	≥ 0.50 Wet
Frost Resistance	10545-12	Resistant			

** These results are for the natural finish and for the normal productions; if there is concern about a particular production, it should be tested. The Dynamic Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs.